


Data sheet


Float switch brass design 26

in combination with temperature switch


Type: SSM...26...T

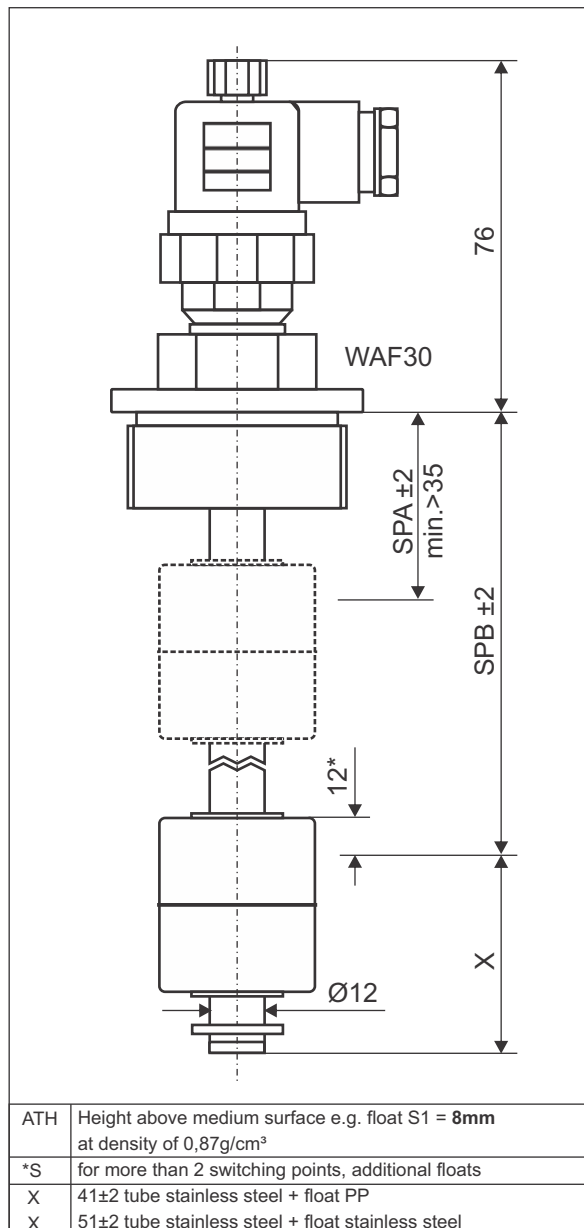

Terminal diagram




1 x change-over contact
+ temperature switch
e.g. Order key:
SSM.1.B5.180.5.S1.T60S



1x n.o. contacts/n.c. contacts
+ temperature switch
e.g. Order key:
SSM.1.B3.200.5.S1.T70S

Order key

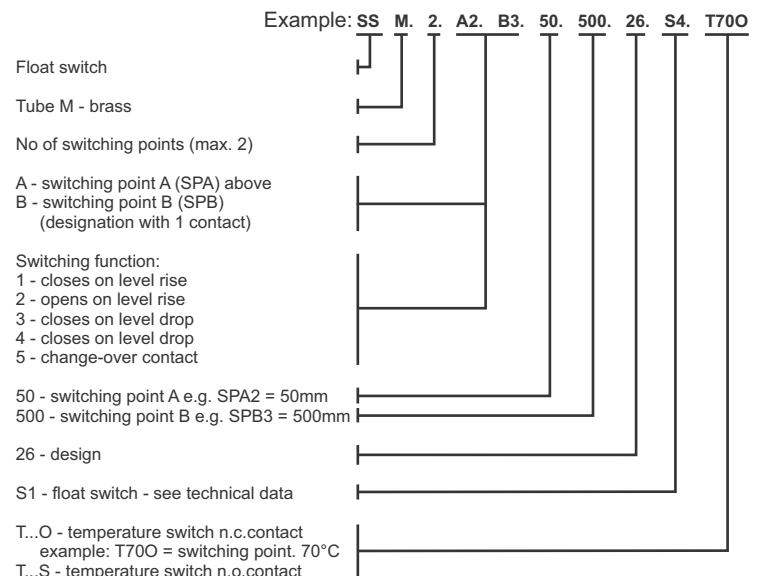

Technical data

Connection:	right-angled connector 3-pole + PE DIN EN 175301-803 (DIN 43650), material PA
Mounting:	thread 1 1/2", material alu
Tube:	Ø12mm material brass
Float:	Ø35x40mm, material PP, type S1 Ø45x52mm, material stainless steel, type S4
Switching points:	reed contacts: max. 2x normally open contact / normally closed contact or 1x change-over contact
Temperature switch:	bi-metal, switching function: normally open contact / normally closed contact temperature range: 60°C to 140°C precision: ±5°C, smaller tolerances on request reset-temperature: temperature switching point -30°C ±15°C
Switching capacity:	max. 230 VAC / 1A / 60VA
Pressure:	max. 1 bar
Operating temperature:	-20°C to 80°C in medium, -20°C to 70°C above mounting
Protection rating:	IP 65